


**Roland Proesch** 

# Signal Analysis for Radio Monitoring



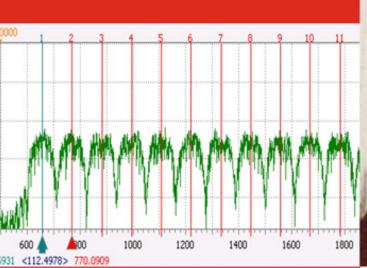

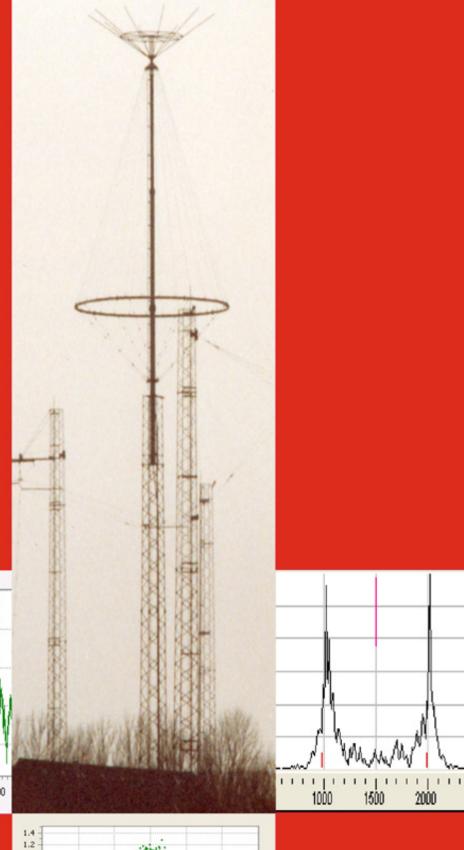



EACH SIGNAL IS INFORMATION

# **Acknowledgement:**

Thanks for those persons who did support me in the preparation of this book:

Aikaterini Daskalaki-Proesch ANgazu Rapidbit

#### **Disclaimer:**

The information in this book has been collected over years. The main problem is that there are not many open sources to get information about this sensitive field. Although I tried to verify this information from different sources it may be that there are mistakes. Please do not hesitate to contact me if you discover any wrong description.

# **Content**

- 1. LIST OF PICTURES
- 2. LIST OF TABLES
- 3. **GENERAL**
- 4. INTRODUCTION

#### **Tools**

Audio Tools

Adobe Audition 1.5 or 3.0

Sound Card Oscilloscope

Analysis Tools

Signals Analyzer

Decoding Tools

CODE 300-32

go2DECODE

## **Bit Analysis**

go2ANALYSE

## **Recordings and Playback**

IQ File Format
Wave File Format
Recognizing File Formats
Audio, real, one channel
Audio, real, two channels

I/Q, complex, two channels I/Q, complex, one channel

#### **Sound Card Clock Correction**

Measurement of the Clock Error with CheckSR

Clock Correction Example HOKA Code 300-32

Clock correction using a FAX station

Clock correction using a STANAG signal

Clock Correction with Signals Analyzer SA

Clock correction using a STANAG signal

#### 5. DESCRIPTION OF WAVEFORMS AND ANALYSIS

#### **Analogue Modulation**

Amplitude Modulation (AM)

Double Sideband Reduced Carrier (DSB-RC)

Double Sideband Suppressed Carrier (DSB-SC)

Single Sideband Full Carrier

Single Sideband Reduced Carrier (SSB-RC)

Single Sideband Suppressed Carrier (SSB-SC)

Single Sideband Modulation (SSB)

Independent Sideband Modulation (ISB)

Vestigial Sideband Modulation (VSB)

Frequency Modulation (FM)

Wide Frequency Modulation (WFM)

Pre-emphasis and De-emphasis

Analysis of a WFM signal

#### **Digital Waveforms**

Amplitude Shift Keying (ASK) Analysis of an ASK Determination of Baud rate of an ASK Oscilloscope Display Spectrum Measurement Eye Diagram Measurement Frequency Shift Keying (FSK) Analysis of a FSK Center, Mark and Space Frequency Frequency Shift Baudrate (Bd) **Modulation Index** Automatic Detection of Center Frequency Manual Detection of Center Frequency Frequency Resolution of FFT Frequency Measurements Single Cursor Two Cursors Three or Harmonic Cursor Determination of Baud rate Baud rate by Sonogram Baud rate by Spectrum via the Envelope Method Baud Rate by Time Length of a Demodulated Bit Stream Auto-Correlation Function ACF for a FSK signal ACF measurement of a FSK signal with HOKA Code300-32

ACF measurement of a FSK signal with Signals Analyzer

Continuous Phase Frequency Shift Keying (CPFSK)

Double Frequency Shift Keying (DFSK)

Analysis of a TWINPLEX Signal

Constant Envelope 4-Level Frequency Modulation (C4FM)

Minimum Shift Keying (MSK)

Tamed Frequency modulation (TFM)

Gaussian Minimum Shift Keying (GMSK)

Recognition of a GMSK Signal

Multi Frequency Shift Keying (MFSK)

Analysis of MFSK signals

Phase Shift Keying (PSK)

Binary Phase Shift Keying (BPSK)

Shaped Binary Phase Shift Keying (SBPSK)

Quadrature Phase Shift Keying (QPSK)

Offset Quadrature Phase Shift Keying (OQPSK)

Staggered Quadrature Phase Shift Keying (SQPSK)

 $\pi/4$  Quadrature Phase Shift Keying ( $\pi/4$  QPSK)

Compatible Differential Offset Quadrature Phase Shift Keying (CQPSK)

Coherent Phase Shift Keying (CPSK)

Differential Coherent Phase Shift Keying (DCPSK)

**8PSK Modulation** 

Differential Phase Shift Keying (DPSK)

Differential Binary Phase Shift Keying (DBPSK)

```
Differential Quadrature Phase Shift Keying
   (DQPSK)
   Differential 8 Phase Shift Keying (D8PSK)
   Quadrature Amplitude Modulation (QAM)
Analysis of a PSK
   Measurement of Baud rate and Center
   Frequency
       Baud rate Measurement with AM- or
       ASK-Method on PSK Signals
   Phase Tools CODE 300-32
       Power Spectrum 600 Bd BPSK
   Measurement of exact Center Frequency
   Example 8PSK A
Absolute PSK (PSK-A) and Differential PSK (PSK-
B)
   PSK Types and their Behaviour
       PSK2-A
       PSK2-B
       PSK4-A
       PSK4-B
       PSK8-A
       PSK8-B
Comparing MSK and DBPSK
Auto-Correlation Function ACF for a PSK signal
   ACF Function in Signals Analyzer SA
   ACF Function in HOKA Code 300-32
PSK-Signals and idle condition
    Idle condition PSK2-A
   Idle condition PSK2-B
```

Idle condition PSK4-A

Idle condition PSK4-B

Idle condition PSK8-A

Idle condition PSK8-B

# Orthogonal Frequency Division Multiplexing (OFDM)

Analysis of an OFDM or Multicarrier Signals

Measurements on a BR6028 Signal

Measurements on a CIS 12 Signal

Measurements on an OFDM Signal with 45

Channels

Measurements on a CODAN Signal

OFDM Measurements with Signals Analyzer

Spread Spectrum (SS) Modulation

Direct Sequence Spread Spectrum (DSSS)

Frequency Hopping Spread Spectrum (FHSS)

Analysis of a Frequency Hopping Signal FSK

Analysis of a Frequency Hopping Signal MFSK

Analysis of a Frequency Hopping Signal PSK

**Analogue Pulse Modulation** 

Pulse Amplitude Modulation (PAM)

Pulse Width Modulation (PWM)

Pulse Position Modulation (PPM)

**Digital Pulse Modulation** 

Pulse Code Modulation (PCM)

**Delta Modulation** 

#### **Various Analysis methods**

**Analysis of Burst Signals** 

```
SITOR ARQ Mode
Analysis of RADAR Signals
   Principle
       Radio frequency
       Antenna scan rate SR
       Transmit time or pulse width/pulse
       duration PW/PD
       Pulse group repetition interval PGRI
       Pulse repetition time PRT
       Pulse repetition frequency PRF
       Pulse Amplitude PA
   Radar Frequency Bands
Analysis of an Over the Horizon Radar OTHR
Signal
    Frequency Modulation Continuous Wave
   (FMCW)
   Frequency Modulation on Pulse FMOP
Analysis of a VHF Radar Signal
Analysis of Satellite Signals
    SCPC Channels Parameter Auto-Correlation
    Function
       SCPC BPSK FEC ½ (0.5)
       SCPC BPSK FEC 3/4 (0.75)
       SCPC BPSK FEC 7/8 (0.875)
       SCPC QPSK FEC ½ (0.5)
       SCPC QPSK FEC 3/4 (0.75)
       SCPC QPSK FEC 7/8 (0.875)
       SCPC 8PSK FEC ½ (0.5)
       SCPC 8PSK FEC 3/4 (0.75)
```

SCPC 8PSK FEC 7/8 (0.875) SCPC 16QAM FEC ½ (0.5) SCPC 16QAM FEC ¾ (0.75)

SCPC 16QAM FEC 7/8 (0.875)

Analysis of a SCPC signal with SA SCPC QPSK FEC 3/4 (0.75)

#### 6. FINGERPRINTING

General

Pre-Carrier and Post-Carrier Fingerprinting with MFSK Signals

#### 7. ADDITIONAL INFORMATION

**Description of Modulation States** 

**Asynchronous Data Transmission** 

Synchronous Data Transmission

Simplex

**Duplex** 

**Half Duplex** 

Semi Duplex

Baud Rate, Bit Rate, Symbol Rate

**Bit Rate** 

Symbol Rate

**Baud rate** 

**Data Formats** 

NRZ (Non Return to Zero)

NRZ (S) (Non Return to Zero - Space)

NRZ (M) (Non Return to Zero - Mark)

Bi-Φ-L (Biphase Level)

Bi-Φ-S (Biphase Space)

```
Bi-Φ- M (Biphase Mark)
Coding
   Code
   Codes in Communication used for Brevity
   An example: the ASCII code
   Interleaving in Error-Correction Coding
   Interleaving Examples
   Codes to Detect or Correct Errors
   Error-Correcting Code (ECC)
   Forward Error Correction (FEC)
   Convolutional Code
   Viterbi Algorithm
   Reed-Solomon Error Correction
       Overview of the Method
       Properties of Reed-Solomon Codes
       Use of Reed-Solomon Codes in Optical and
       Magnetic Storage
       Timeline of Reed-Solomon Development
       Satellite Technique: Reed-Solomon + Viterbi
       coding
   Turbo Code
   Shannon-Hartley Theorem
       Theorem
       Examples
Used code tables
   ITA2, ITA2P and ITA3(CCIR342-2)
Russian MTK2
Chinese Telegraph Code
CCIR476-4, HNG-FEC, PICCOLO MK VI
```

```
ITA 2 P
   ITA 3
   CCIR 476
   ASCII / CCITT 5
   CCIR 476
   ASCII / CCITT 5
Channel access methods
   Frequency-Division Multiple Access (FDMA)
   Time Division Multiple Access (TDMA)
    Code Division Multiple Access (CDMA)
    Orthogonal Frequency Multiple Access (OFDMA)
The OSI Reference Model
   The Physical Layer
   The Data Link Layer
   The Network Layer
   The Transport Layer
   The Session Layer
   The Presentation Layer
   The Application Layer
Protocols
   ACP127
   STANAG 4406 Messaging
   STANAG 5066
   X.25
    RSX.25
   Automatic Link Establishment (ALE)
   Designation of Emissions
    Determination of Necessary Bandwidths
Table of Systems sorted by Baud rate
```

- 8. ABBREVIATIONS
- 9. INDEX

# 1. List of Pictures

- Picture 1: Main view Adobe Audition 1.5
- Picture 2: View of a waveform in Adobe Audition 1.5
- Picture 3: Time measurement of an OTHR
- Picture 4: Main view of the Soundcard Oscilloscope
- Picture 5: Signals Analyzer
- Picture 6: Main view CODE 300-32
- Picture 7: Phase constellation with and without noise
- Picture 8: CODE300 Symbol rate measurement of an 8PSK
- Picture 9: CODE300 FSK oscilloscope
- Picture 10: CODE300 Speed bit measurement
- Picture 11: CODE300 spectrogram
- Picture 12: go2DECODE main screen
- Picture 13: go2DECODE signal identification
- Picture 14: go2DECODE production
- Picture 15: go2DECODE measurement with harmonic
- cursors
- Picture 16: go2DECODE analysis display
- Picture 17: go2DECODE phase constellation
- Picture 18: go2ANALYSE bit display
- Picture 19: Bit stream view with pattern search
- Picture 20: Bit display parameters

- Picture 21: Different display modes
- Picture 22: go2ANALYSE autocorrelation
- Picture 23: Songaram of a real mono signal
- Picture 24: Spectrum of a real mono signal
- Picture 25: Sonagram of a stereo signal
- Picture 26: Spectrum of a stereo signal
- Picture 27: Phase display of a stereo audio signal
- Picture 28: I/Q baseband signal sonagram
- Picture 29: I/Q baseband signal spectrum
- Picture 30: I/Q baseband signal phase display
- Picture 31: I/Q baseband signal sonogram converted to real
- Picture 32: I/Q baseband signal spectrum converted to real
- Picture 33: I/Q baseband signal one channel sonagram
- Picture 34: I/Q baseband signal one channel spectrum
- Picture 35: Result of CheckSR.EXE
- Picture 36: Clock correction with a FAX station
- Picture 37: Clock correction with a FAX station after adjustment
- Picture 38: Clock correction with a STANAG 4285 signal
- Picture 39: Clock correction with a STANAG 4285 signal after adjustment
- Picture 40: Clock Correction with Signals Analyzer step 1
- Picture 41: Clock Correction with Signals Analyzer step 2
- Picture 42: Clock Correction with Signals Analyzer step 3
- Picture 43: Different AM waveforms

Picture 44: Spectrum and sonogram of an amplitude modulation

Picture 45: Spectrum of a double sideband suppressed carrier signal

Picture 46: Spectrum and sonogram of a single sideband modulation with full carrier

Picture 47: Spectrum and sonogram of a single sideband modulation with reduced carrier

Picture 48: Spectrum of a single sideband modulation

Picture 49: Spectrum of an independent modulated signal

Picture 50: Frequency Modulation

Picture 51: Spectrum and sonogram of a frequency modulation

Picture 52: Spectrum of a wide FM broadcast transmitter

Picture 53: Spectrum of FM stereo signal with sub-channels

Picture 54: Amplitude Shift Keying (ASK)

Picture 55: Spectrum of an ASK with 100 Bd

Picture 56: On Off Keying OOK

Picture 57: Oscilloscope display of an ASK

Picture 58: Measurement of ASK baud rate

Picture 59: Different method of baud rate measurement of an ASK

Picture 60: Spectrum measurement of an ASK with 200 Bd

Picture 61: Spectrum measurement of an ASK with 2000 Bd

Picture 62: Different measurement of the baud rate of an ASK

Picture 63: Measurement with eye diagram

Picture 64: Eye diagram with moderate noise

Picture 65: Eye diagram with more noise

Picture 66: Frequency Shift Keying (FSK)

Picture 67: Spectrum of an FSK

Picture 68: Center, mark and space frequency

Picture 69: Frequency shift

Picture 70: FSK with a modulation index M = 1

Picture 71: FSK with a modulation index M = 6

Picture 72: FSK with a modulation index M = 10

Picture 73: MSK with a modulation index M = 0.5

Picture 74: Automatic measurements

Picture 75: Automatic baud rate and shift measurement

Picture 76: Spectrogram display with low FFT resolution

Picture 77: Spectrogram display with high FFT resolution

Picture 78: Mark and space frequency measurement

Picture 79: Frequency measurement with three or harmonic cursor

Picture 80: Baud rate measurement with sonogram

Picture 81: Baud rate measurement with sonogram and harmonic cursor

Picture 82: Spectrum envelope method display

Picture 83: Frequency measurement of Baud rate

Picture 84: Demodulated FSK signal

Picture 85: Bit length measurement with two cursors

Picture 86: Bit length measurement with harmonic cursor

Picture 87: ACF of a Fax signal

Picture 88: ACF of a STANAG 4285 signal measured with HDSDR

Picture 89: ACF function in CODE 300-32

Picture 90: ACF result on CODE300-32

Picture 91: ACF measurement with SA step 1

Picture 92: ACF measurement with SA step 2

Picture 93: ACF measurement with SA step 3

Picture 94: ACF measurement with SA step 4

Picture 95: ACF measurement with SA step 5

Picture 96: Spectrum of a CPFSK with 100 Bd

Picture 97: Spectrum of a DFSK

Picture 98: Spectrum of a typical TWINPLEX signal

Picture 99: Measurement of TWINPLEX tone distance

Picture 100: Baud rate measurement of a TWINPLEX signal

Picture 101: Sonogram of a TWINPLEX signal

Picture 102: Example of a Voice Frequency Telegraphy (VFT)

Picture 103: IQ Plot of C4FM

Picture 104: Sonogram and spectrum of C4FM in idle mode

Picture 105: Spectrum of a MSK

Picture 106: Minimum Shift Keying

Picture 107: One time squaring of a MSK

Picture 108: Spectrum of a Tamed Frequency Modulation

(TFM 3) with 100 Bd

Picture 109: BPSK signal with 1200 Bd

Picture 110: GMSK signal with 1200 Bd

Picture 111: Constellation display of a BPSK signal

Picture 112: Constellation display of a GMSK signal

Picture 113: Spectrum of a MFSK with 12 tones

Picture 114: MFSK in the spectrogram view

Picture 115: Number of tones of a MFSK

Picture 116: MFSK with 36 tones

Picture 117: Spectrum of a MFSK with 36 tones

Picture 118: Measurement of tone duration of a MFSK

Picture 119: MFSK measurement with harmonic cursor

Picture 120: Tone duration measurement with MFSK

oscilloscope

Picture 121: Determination of numbers of tones of a MFSK

Picture 122: Phase shift Keying

Picture 123: BPSK-A

Picture 124: Phase plane of a BPSK

Picture 125: Spectrum of a BPSK with 600 Bd

Picture 126: BPSK-B

Picture 127: QPSK-A

Picture 128: QPSK-B

Picture 129: Spectrum of a QPSK with 600 Bd

Picture 130: Phase plane of a QPSK

Picture 131: Phase plane of an OQPSK (left) compared to

QPSK (right)

Picture 132: OQPSK with one squaring

Picture 133: OQPSK with a double squaring

Picture 134: Analysis display of an OQPSK

Picture 135: Analysis display of a DBPSK

- Picture 136: Phase constellation of a  $\pi/4$  QPSK
- Picture 137: Phase Plane of an 8PSK
- Picture 138: Spectrum of an 8PSK with 600 Bd
- Picture 139: Example of an 8QAM and 16QAM in the Phase
- Plane
- Picture 140: Spectrum of a QAM8 with 600 Bd
- Picture 141: Spectrum of a QAM16 with 600 Bd
- Picture 142: Amplitude behavior of an absolute BPSK
- Picture 143: Amplitude behavior of a differential BPSK
- Picture 144: Amplitude behavior of an absolute QPSK
- Picture 145: Amplitude behavior of a differential QPSK
- Picture 146: Amplitude method of symbol rate measurement
- Picture 147: Recorded signal for ASK-method
- Picture 148: Setup for ASK-method
- Picture 149: Result of the ASK-method
- Picture 150: Estimation of the center frequency
- Picture 151: Symbol rate measurement of a PSK
- Picture 152: Baud rate of a PSK signal
- Picture 153: Spectrum of a BPSK
- Picture 154: Centering of BPSK I
- Picture 155: Centering of BPSK II
- Picture 156: 8PSK after single squaring
- Picture 157: 8PSK after double squaring
- Picture 158: 8PSK after triple squaring
- Picture 159: Phase constellation of an 8PSK
- Picture 160: Double squaring of a QPSK-A

- Picture 161: Double squaring of a QPSK-B
- Picture 162: Analysis display of a MSK with 600 Bd
- Picture 163: Analysis display of a DBPSK with 600 Bd
- Picture 164: Squaring of a MSK with 600 Bd
- Picture 165: Squaring of a DBPSK with 600 Bd
- Picture 166: Constellation display of a DBPSK
- Picture 167: Constellation display of a MSK
- Picture 168: ACF function in SA step 1
- Picture 169: ACF function in SA step 2
- Picture 170: ACF function in SA step 3
- Picture 171: ACF function in SA step 4
- Picture 172: ACF function in SA step 5
- Picture 173: ACF function in SA step 6
- Picture 174: ACF function in SA step 7
- Picture 175: ACF function in SA step 8
- Picture 176: ACF function in SA step 9
- Picture 177: ACF function in Code300-32 step 1
- Picture 178: ACF function in Code300-32 step 2
- Picture 179: RYRY loop in a Baudot transmission
- Picture 180: Idle condition PSK2-A 2400 Bd
- Picture 181: Idle condition PSK2-A 600 Bd
- Picture 182: Idle condition PSK2-B 2400 Bd
- Picture 183: Idle condition PSK2-B 600 Bd
- Picture 184: Idle condition PSK4-A with 2400 Bd
- Picture 185: Idle condition PSK4-A 600 Bd

Picture 186: Idle condition PSK4-B with 2400 Bd

Picture 187: Idle condition PSK4-A with 600 Bd

Picture 188: Idle condition PSK8-A with 2400 Bd

Picture 189: Idle condition PSK8-A with 600 Bd

Picture 190: Idle condition PSK8-B with 2400 Bd

Picture 191: Idle condition PSK8-B with 600 Bd

Picture 192: Comparison of FDM and OFDM

Picture 193: Spectrum of OFDM with 45 channels

Picture 194: OFDM with 45 carriers

Picture 195: Spectrum of a BR6028 signal

Picture 196: Shift measurement of a BR6028 signal

Picture 197: Measurement with the FSK oscilloscope

Picture 198: CIS12/MS5 spectrum with reference tone

Picture 199: CIS 12/MS5 spectrum in idle mode

Picture 200: CIS12 in the phase spectrum

Picture 201: Selection of one channel of a CIS12

Picture 202: Symbol rate measurement on a CIS12 signal

Picture 203: Single squaring of one channel of a CIS12 signal

Picture 204: Double squaring of one channel of a CIS12 signal

Picture 205: CIS OFDM with 45 channels

Picture 206: Measurement of the total bandwidth of a CIS OFDM with 45 channels

Picture 207: Channel spacing of a CIS OFDM with 45 channels

Picture 208: Display of one channel of a CIS OFDM with 45 channels

Picture 209: single squaring of one channel of a CIS OFDM 45 channels

Picture 210: Phase constellation of one channel of a CIS OFDM 45 channels

Picture 211: Spectrum and sonogram of a CODAN signal

Picture 212: Tone distance measurement with harmonic cursor

Picture 213: Loading of signal

Picture 214: Signal adjustment

Picture 215: Selection of signal

Picture 216: OFDM module

Picture 217: Automatic OFDM analysis

Picture 218: Display adjustment

Picture 219: Determination of carrier number

Picture 220: Modulation analysis

Picture 221: Constellation display

Picture 222: Constellation adjustment

Picture 223: Function of DSSS

Picture 224: Function of FHSS

Picture 225: Frequency hopper with a hopping bandwidth of

5 MHz

Picture 226: Selection of one hop of a frequency hopper

Picture 227: Spectrogram view of a repeated hop

Picture 228: Analysis display of a repeated hop

Picture 229: Measurement of the duration of one frequency hop

Picture 230: Expanded display of one hop

Picture 231: Shift measurement of one hop

Picture 232: Baud rate measurement of one hop

Picture 233: Spectrum of a MFSK frequency hopper

Picture 234: Frequency analysis display of one hop of a MFSK frequency hopper

Picture 235: Measurement of symbol rate of the FH MFSK

Picture 236: Measurement of tone distance of the FH MFSK

Picture 237: Frequency hopper with BPSK modulation

Picture 238: Single hops of the frequency hopper with BPSK modulation

Picture 239: Hop length measurement of the frequency hopper with BPSK modulation

Picture 240: Bit length measurement of the frequency hopper with BPSK modulation

Picture 241: Different types of amplitude modulation

Picture 242: Quantization in a PCM

Picture 243: Delta Modulation

Picture 244: Pause measurement of a SITOR A signal

Picture 245: Transmission measurement of a SITOR A signal

Picture 246: Analysis display of a burst signal

Picture 247: Analysis display of a burst signal

Picture 248: Shift measurement of a burst signal

Picture 249: Baud rate measurement of a burst signal

Picture 250: RADAR principle

Picture 251: RADAR timing

Picture 252: Pulse group repetition interval

Picture 253: Parameter of an OTHR Radar signal

Picture 254: Measurement of PRT of OTHR

Picture 255: Measurement of PW of an OTHR

Picture 256: Frequency Modulation Continuous Wave

Picture 257: Spectrum of a FMCW

Picture 258: FMCW sweep

Picture 259: FMOP sweep

Picture 260: Oscilloscope display of a FMOP

Picture 261: Sonagram of a CODAR

Picture 262: VHF RADAR sonagram

Picture 263: Scan rate measurement of a VHF RADAR

Picture 264: Analysis VHF RADAR step 1

Picture 265: Analysis VHF RADAR step 2

Picture 266: Analysis VHF RADAR step 3

Picture 267: Analysis VHF RADAR step 4

Picture 268: Analysis VHF RADAR step 5

Picture 269: Analysis VHF RADAR step 6

Picture 270: Analysis VHF RADAR step 7

Picture 271: Analysis of a VHF RADAR step 8

Picture 272: Analysis of a VHF RADAR step 10

Picture 273: Analysis of a VHF RADAR step 11

Picture 274: Analysis of a VHF RADAR step 12

Picture 275: Analysis of a VHF RADAR step 13

Picture 276: Analysis of a VHF RADAR step 14

Picture 277: CSA Spectrum analyser with identified carriers

Picture 278: CSA list of classified carriers

Picture 279: Analysis of a SCPC signal with SA step 1

Picture 280: Analysis of a SCPC signal with SA step 2

Picture 281: Analysis of a SCPC signal with SA step 3

Picture 282: Analysis of a SCPC signal with SA step 4

Picture 283: Analysis of a SCPC signal with SA step 5

Picture 284: Analysis of a SCPC signal with SA step 6

Picture 285: Analysis of a SCPC signal with SA step 7

Picture 286: Transmitter AGC ramp down

Picture 287: Transmitter AGC ramp up

Picture 288: Pre-carrier of a 75 Bd/850 Hz signal with seven

pre-carrier bits

Picture 289: Demodulation of the 75 Bd/850 Hz pre-carrier

with seven pre-carrier bits

Picture 290: Pre-carrier of a 75 Bd/850 Hz signal with one

pre-carrier bit

Picture 291: Demodulation of a 75 Bd/850 Hz signal with

one pre-carrier bit

Picture 292: Example of a 50 Bd/200 Hz signal

Picture 293: Tone display of a 4FSK

Picture 294: Demodulation of a 4FSK with peaks

Picture 295: Common data formats

Picture 296: Chinese translation

Picture 297: Principle of FDMA

Picture 298: Principle of TDMA

Picture 299: Principle of OFDMA

Picture 300: The OSI reference model

Picture 301: STANAG 5066 layers

# 2. List of Tables

- Table 1: Chunks in the wave format
- Table 2: Wave format description
- Table 3: Example of a wave file
- Table 4: Possible file formats
- Table 5: Relation between time of symbol/bit and baudrate
- Table 6: Bit length and baudrates
- Table 7: TWINPLEX modes
- Table 8: TWINPLEX shift modes
- Table 9: Result of tone frequency measurement
- Table 10: C4FM symbol table
- Table 11: Bit value for QPSK
- Table 12: Phase shifts for CQPSK
- Table 13: Bit values for QAM
- Table 14: Squaring of PSK signals
- Table 15: Influence of noise to PSK signals
- Table 16: Types of PSK and their phase shifts
- Table 17: Characteristics of a PSK2-A
- Table 18: Characteristics of a PSK2-B
- Table 19: Characteristics of a PSK4-A
- Table 20: Characteristics of a PSK4-B
- Table 21: Characteristics of a PSK8-A